

Product data sheet




Contactor, TeSys Deca, 3P(3 NO), AC-3/AC-3e, 0 to 440V, 25A, 220VAC 50/60Hz coil

LC1D25M7

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications


Dimensions

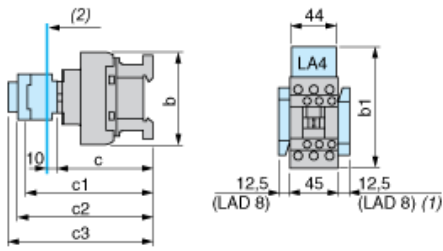

- (1) Including LAD 4BB
- (2) Minimum electrical clearance

| LC1 | | D25...D38 (3-pole) |
|------------|------------------------------------|--------------------|
| b | without add-on blocks | 85 |
| b1 | with LAD 4BB | 98 |
| | with LA4 D•2 | 114 ⁽¹⁾ |
| | with LA4 DF, DT | 123 ⁽¹⁾ |
| | with LA4 DW, DL | 130 ⁽¹⁾ |
| c | without cover or add-on blocks | 90 |
| | with cover, without add-on blocks | 92 |
| c1 | with LAD N or C (2 or 4 contacts) | 123 |
| c2 | with LA6 DK10, LAD 6K10 | 135 |
| c3 | with LAD T, R, S | 143 |
| | with LAD T, R, S and sealing cover | 147 |
| (1) | Including LAD 4BB. | |

Wiring



Recommended replacement(s)